

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/24/16'	~	

Material:

Housing Material: PBT, PA66, PA46, High Temp Nylon UL94V-0,
Black and Grey Color

Contact Material: Phosphor Bronze 0.46mm, Round PIN

Plating: Gold Plating over Nickel

Electrical:

Voltage Rating: 125 V AC RMS

Current Rating: 1.5 Amp

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min. @ 500 VDC

Dielectric Withstanding Resistance: 1000 VAC RMS 60Hz, 1 Min.

Mechanical:


Durability : 750 Cycles Min.

PCB Retention Force: 10 LBS Min.

Environmental:

Storage Temperature : -40°C to +85°C

Operation Temperature: -40°C to +85°C

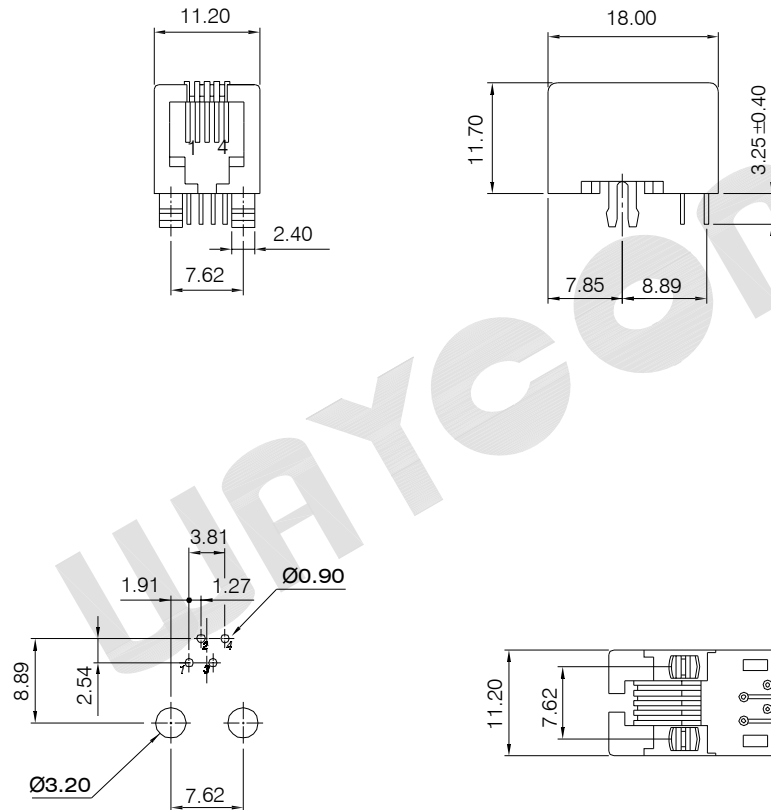

PCB LAYOUT/TOP VIEW

MJCA - X X X X X			
No. of Positions	Positions Loaded	Housing Color	Contact Plating
4,6	2,4,6	1 - Black	1 - G/Fμ"
		2 - Grey	2 - 3μ"
		3 - Others	3 - 6μ"
			4 - 15μ"
			5 - 30μ"
			6 - 50μ"

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		RJ9, RJ10, RJ22 4P4C	
X.	±0.60	X.	±5°	UNITS	mm	Telephone Handset Jack Socket			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	MJCA SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER			WAYCONN CO.,LTD				
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		MJCA - XXXXX							